




sense **MOTORS**
NO RADIO





Quick guide

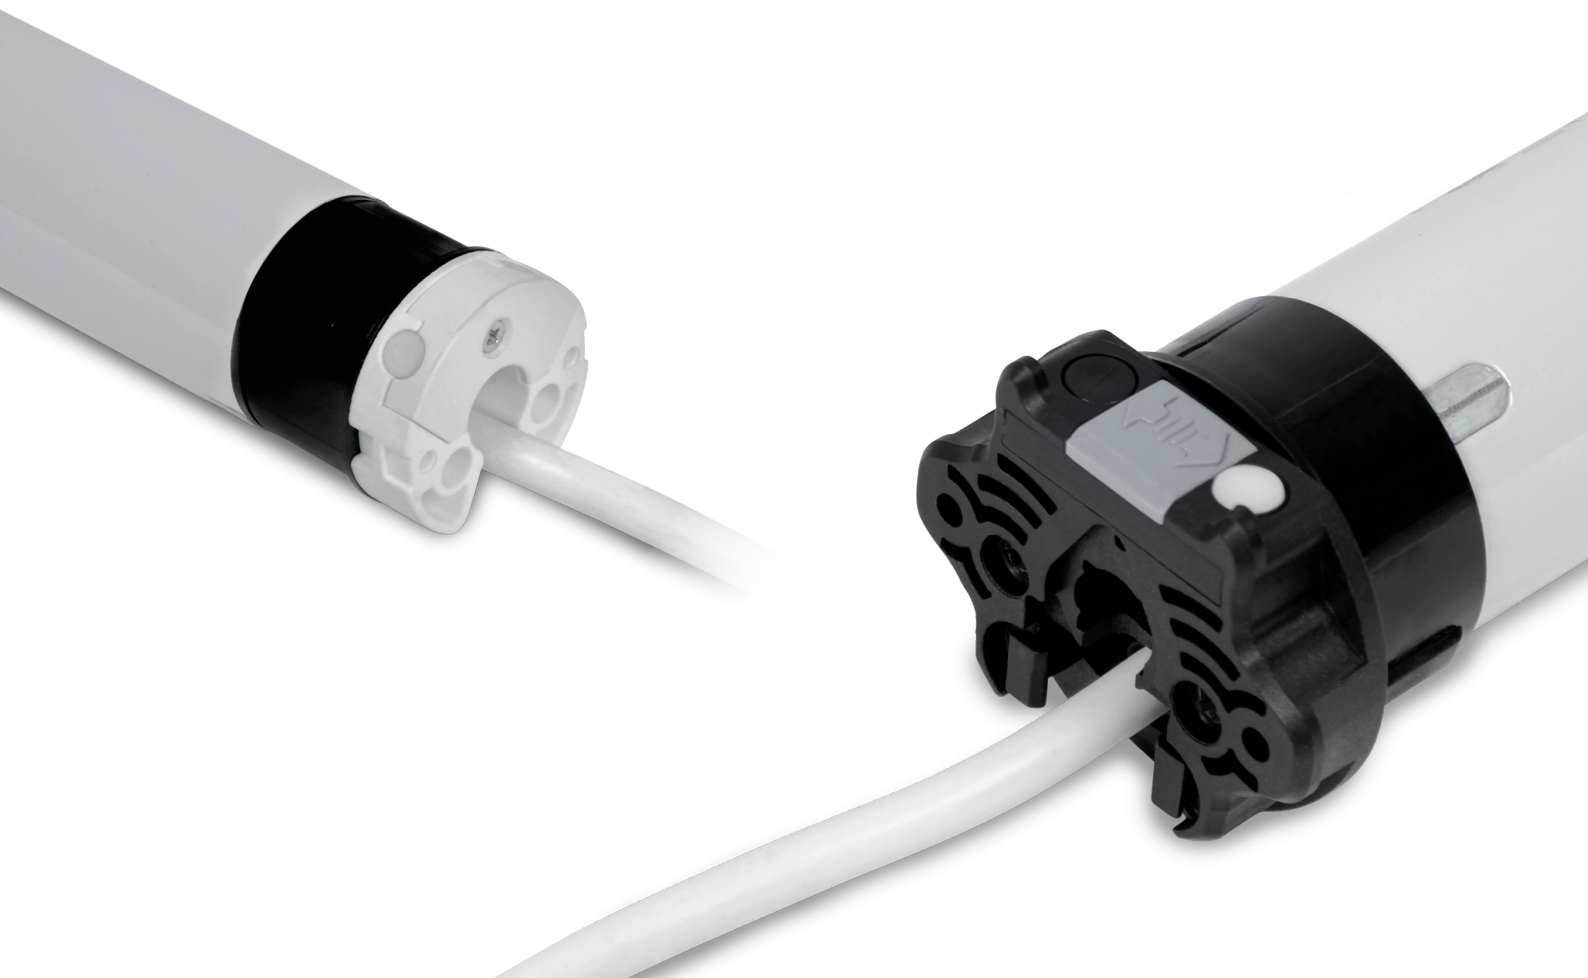

GAPOSA Inc.
3920 Providence Road - Newtown Square PA 19073
Ph. 610 325 3697
info@gaposa.com

1. CONNECT MOTOR

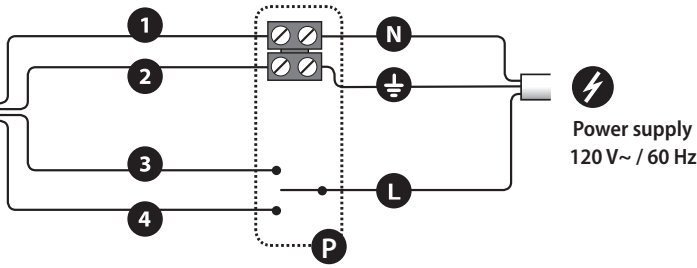

- 1 Neutral White
 - 2 Ground Yellow/green
 - 3 Direction of rotation 1 Red
 - 4 Direction of rotation 2 Black
-
- P Push Button
 - N Neutral
 - ⊥ Ground
 - L Phase

2. POINT TO POINT END LIMIT SETTING WITH GAPOSA PUSH BUTTON - ACPRE (The TOP limit must always be set first)

1 Position the motor at a location in between the two limits that need to be set

2 To enter into Limit Setting mode: Press and hold both the UP and DOWN buttons simultaneously until the motor makes a jog.

3 Press and hold the UP button until the desired top limit is reached. Note: The motor will operate in dead man control. Press and hold the up or down button for the motor to move.

4 Press and hold both the UP and DOWN buttons simultaneously until the motor makes a jog. The Top limit is now set.

5 Press and hold the DOWN button until the desired bottom limit is reached. Note: The motor will operate in dead man control. Press and hold the up or down button for the motor to move.

6 Press and hold both the UP and DOWN buttons simultaneously until the motor makes a jog. The Bottom limit is now set and the Limit setting procedure is complete

Note: When operating the motor in limit setting mode, the motor will occasionally stop briefly to signify that it is in limit setting mode.

3. DEACTIVATION/ACTIVATION OF THE OBSTACLE FUNCTION (A standard push button or GaposA ACPRE can be used)

1 Follow the sequence below to activate or deactivate the obstacle detection function.

2 Keep pressing the DOWN button until the motor jogs:

- Obstacle detection **deactivated**: 1 short jog
- Obstacle detection **activated**: 2 short jog

Note: Down button must be held until the motor performs the desired one or two jogs.